

## Yealink W52P/W56P IP DECT Phone Release Notes of Version 81

### Table of Contents

<b>Yealink W52P/W56P IP DECT Phone Release Notes of Version 81 .....</b>	<b>1</b>
<b>Yealink W52P/W56P IP DECT Phone Release Notes of Version 25.81.193.10 .....</b>	<b>2</b>
1. Introduction .....	2
2. New Features .....	2
3. Optimization.....	2
4. Bug Fixes.....	3
5. New Features Descriptions .....	3
6. Optimization Descriptions.....	11
7. Configuration Parameters Enhancements .....	15

## Yealink W52P/W56P IP DECT Phone Release Notes of Version 25.81.193.10

### 1. Introduction

- Firmware Version:  
Base for W52P/W56P: 25.80.193.10 upgrades to 25.81.193.10.  
W56H: 61.80.0.15 upgrades to 61.81.0.30.  
W52H: 26.73.0.40 upgrades to 26.81.0.30.
- Applicable Models: Base for W52P/W56P, W56H, W52H
- Release Date: Sept 25<sup>th</sup>, 2017.

### 2. New Features

1. Added a new Auto-P (Auto Provisioning) mechanism, including how to upgrade the firmware, how to import and export CFG configuration files, how to backup contacts, etc.
2. Added the feature of Multicast Paging.
3. Added the feature of Emergency Dialplan.
4. Added the feature that you can enable the IP DECT phone to encrypt <MAC>-local.cfg file using the plaintext AES key.
5. Added the feature of Manual NAT (Static NAT) and ICE.
6. Added the feature that if the server.url is changed, then the phone will do the auto-provisioning automatically.
7. Added the feature of Call Park.
8. Added the feature of Ringer Device for Headset.
9. Added the feature of Number of Registered Handsets.

### 3. Optimization

1. Optimized the feature of Upgrading Firmware.
2. Optimized the feature of Redirection and Provisioning Service (RPS).
3. Optimized the feature of Network conference.
4. Optimized the feature of Audio Codec Configuration.

5. Optimized the feature of Time and Date.
6. Optimized the Status item in the web user interface.
7. Optimized the feature that the last four characters of MAC address will be included as a part of base ID, for example, Base1 FCC5.
8. Optimized the feature of Viewing Log Files.
9. Optimized the feature of 802.1X Authentication.
10. Optimized the feature of Call Waiting.
11. Optimized the feature that the LCD screen will be turned off if the handset is in the idle state for 30 minutes.

## 4. Bug Fixes

1. Fixed the issue that you cannot input the password with special characters, including \*,',?!\\-()@/:\_;+&%=<> £ \$¥☉[]{}~^¡ ¢ § #".

## 5. New Features Descriptions

1. **Added a new Auto-P (Auto Provisioning) mechanism, including how to upgrade the firmware, how to import and export CFG configuration files, how to backup contacts, etc.**

### Description:

#### I. Auto Provisioning Deployment Mechanism

(1) Users can use Boot Files to provision the phones. The boot files are valid BOOT files that can be created or edited using a text editor such as UltraEdit. The boot files are first downloaded when you provision the phones using centralized provisioning (refer to Central Provisioning). You can reference some configuration files in the boot files (including features.cfg and network.cfg) to be acquired by all your phones and specify the download sequence of these configuration files.

**Note:** If you use Boot Files to provision the phones, the overwrite mode and layer mechanism will be enabled by default.

(2) If there is no any Boot Files, the phone will use the old Auto-P mechanism to download the Y000000000xx.cfg and mac.cfg files as before.

#### II. Overwrite Mode

The overwrite mode will be applied to the configuration files specified to download. If the value of a parameter in configuration files is deleted or commented out, the factory default value can take effect immediately after auto

provisioning. Overwrite mode doesn't affect the non-static settings configured via web/phone user interface. After auto provisioning, non-static setting of the configuration item in the <MAC>-local CFG file will be written and saved to the IP phone system.

### III. Layering Mechanism for Reset

If *static.auto\_provision.custom.protect* is set to 1 (Enabled), personalized settings configured via web or phone user interface will be kept after auto provisioning. There are three layers: Local, Auto Provision and Static which includes five ways to reset the phone:

**Reset local settings:** All configurations saved in the <MAC>-local.cfg configuration file on the IP phone will be reset.

**Reset non-static settings:** All configurations except the static configurations on the phone will be reset.


**Reset static settings:** All static configurations on the phone will be reset.

**Reset userdata & local config:** All the local cache data (e.g., userdata, history, directory) will be cleared.

**Reset to factory:** All configurations on the phone will be reset.

#### To clear personalized configuration settings via web user interface:

Click on Settings -> Upgrade.

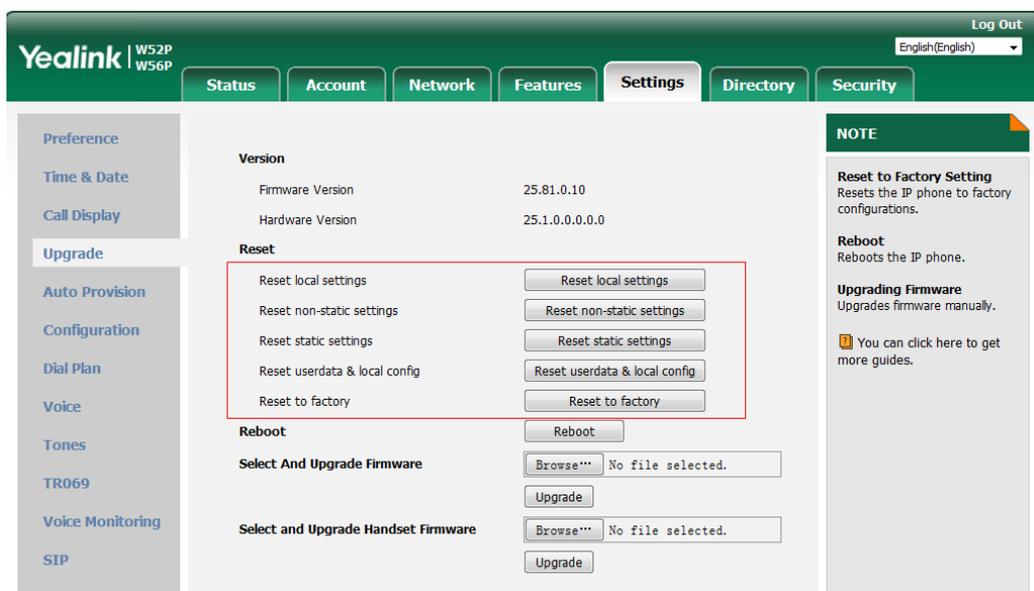


### IV. Import CFG Configuration Files

Users can import CFG configuration files via web user interface and all the configuration will be taken effect on your IP phones. The imported configuration belongs to Local layer.

## To import CFG configuration files via web user interface:

Click on Settings -> Configuration.

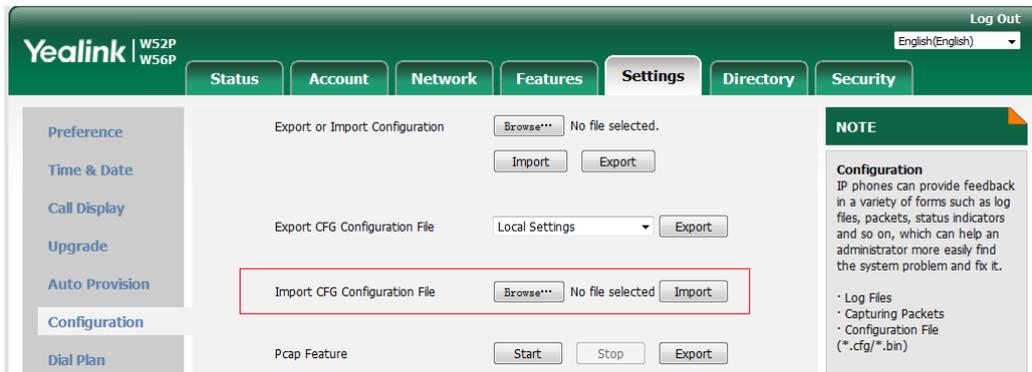


## V. Export CFG Configuration Files

Users can export all the CFG configuration files via web user interface, including MAC-local.cfg, MAC-config.cfg, MAC-non-static.cfg, MAC-static.cfg and MAC-all.cfg.

## To export CFG configuration files via web user interface:

Click on Settings -> Configuration.

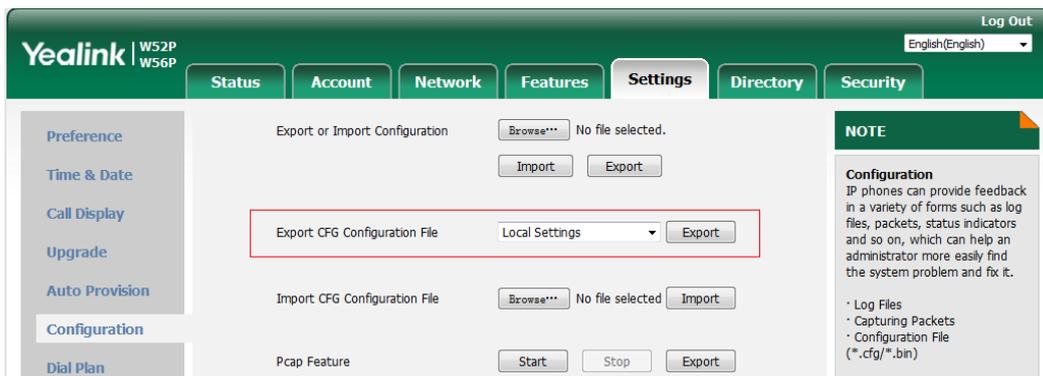

## VI. Flexible Auto Provision

The IP phone performs the auto provisioning process at a random time on a random day within a specific period of time. The random day is calculated on the basis of the phone's MAC address. You can specify an interval and configure what time of the day to trigger the IP phone to perform the auto provisioning process.

## To configure this feature via web user interface:

Click on Settings -> Auto Provision

**Auto Provision**

PNP Active  On  Off

DHCP Active  On  Off

Custom Option(128~254)

DHCP Option Value

Server URL

User Name

Password

Attempt Expired Time(s)

Common AES Key

MAC-Oriented AES Key

Power On  On  Off

Flexible Auto Provision  On  Off

Flexible Interval Days

Flexible Time

**NOTE**

**Auto Provision**  
The IP phone can interoperate with provisioning server using auto provisioning for deploying the IP phones.

When the IP phone triggers to perform auto provisioning, it will request to download the configuration files from the provisioning server. During the auto provisioning process, the IP phone will download and update configuration files to the phone flash.

[You can click here to get more guides.](#)

**For example:**

**File Template for y000000000000.boot:**

```
#!version:1.0.0.1
```

```
## The header above must appear as-is in the first line
```

```
include:config <xxx.cfg>
```

```
include:config "xxx.cfg"
```

```
overwrite_mode = 1
```

**The parameters in the auto provision template are described as follows:**

```
static.auto_provision.flexible.enable =
```

```
static.auto_provision.flexible.interval =
```

```
static.auto_provision.flexible.begin_time =
```

```
static.auto_provision.flexible.end_time =
```

```
static.network.dhcp.option60type =
```

```
static.auto_provision.attempt_before_failed =
```

```
static.auto_provision.retry_delay_after_file_transfer_failed =
```

```
static.auto_provision.custom.sync.path =
```

```
static.auto_provision.server.type =
```

*static.auto\_provision.user\_agent\_mac.enable =*

*static.auto\_provision.custom.protect =*

*static.auto\_provision.custom.sync =*

*static.auto\_provision.custom.upload\_method =*

For more information, please refer to

*Yealink IP DECT Phone Administrator Guide\_V81\_10*

## 2. Added the feature of Multicast Paging.

**Description:** Multicast paging allows IP DECT phones to send/receive Real-time Transport Protocol (RTP) streams to/from the pre-configured multicast address(es) on the desired channel without involving SIP signaling. Up to 31 listening multicast addresses can be specified on the IP DECT phone.

**To configure the multicast paging via web user interface:**

Click on Directory -> Multicast IP.

The screenshot shows the Yealink web interface for configuring Multicast IP. The 'Directory' menu is active. The 'Multicast Listening' section contains a table with 10 rows. The first row is pre-filled with '224.5.6.20:10008', 'dd', '1', and '1'. The 'Paging List' section contains a table with 3 rows. The first row is pre-filled with '224.1.6.25:1001', 'ff', '1', and '1'. A 'NOTE' box on the right states: 'Multicast Paging: Multicast paging allows IP phones to send/receive Real-time Transport Protocol (RTP) streams to/from the pre-configured multicast address(es) without involving SIP signaling. Up to 10 listening multicast addresses can be specified on the IP phone. You can click here to get more guides.'

**The parameters in the auto provision template are described as follows:**

*multicast.codec =*

*multicast.paging\_address.X.ip\_address =*

*multicast.paging\_address.X.label =*

*multicast.paging\_address.X.channel =*

*multicast.listen\_address.X.ip\_address =*

*multicast.listen\_address.X.label =*

*multicast.listen\_address.X.channel =*

*multicast.listen\_address.X.volume =*

*multicast.receive.use\_speaker =*

For more information, please refer to the

*Yealink IP DECT Phone Administrator Guide\_V81\_10*

### 3. Added the feature of Emergency Dialplan.

**Description:** Emergency dialplan allows users to dial the emergency telephone number (emergency services number) at any time when the IP phone is powered on and has been connected to the network. It is available even if your phone keypad is locked or no SIP account has been registered.

**The parameters in the auto provision template are described as follows:**

*dialplan.emergency.asserted\_id\_source =*

*dialplan.emergency.custom\_asserted\_id =*

*dialplan.emergency.server.x.address =*

*dialplan.emergency.server.x.port =*

*dialplan.emergency.server.x.transport\_type =*

*dialplan.emergency.x.value =*

*dialplan.emergency.x.server\_priority =*

### 4. Added the feature that you can enable the IP DECT phone to encrypt <MAC>-local.cfg file using the plaintext AES key.

**Description:** When you enable this feature, the MAC-local CFG file is uploaded encrypted and replaces the one (encrypted or unencrypted) stored on the server if you have configured to back up the MAC-local CFG file to the server by the parameter “static.auto\_provision.custom.sync”. The plaintext AES key is configured by the parameter “static.auto\_provision.aes\_key\_16.mac”.

**The parameters in the auto provision template are described as follows:**

*static.auto\_provision.encryption.config =*


### 5. Added the feature of Manual NAT (Static NAT) and ICE.

**Description:** Manual NAT helps IP connections traverse NAT gateways without the third-party network server (STUN/TURN server). If manual NAT feature is enabled, the configured public IP address and port can be carried in the SIP requests or RTP packets, in which the other party obtains the phone’s public address. It is

useful to reduce the cost the company's network deployment. You can also enable the ICE feature via web user interface. In an ICE environment, two IP phones communicating at different locations are able to communicate via the SIP protocol by exchanging Session Description Protocol (SDP) messages.


### To configure manual NAT via web user interface:

Click on Network -> NAT

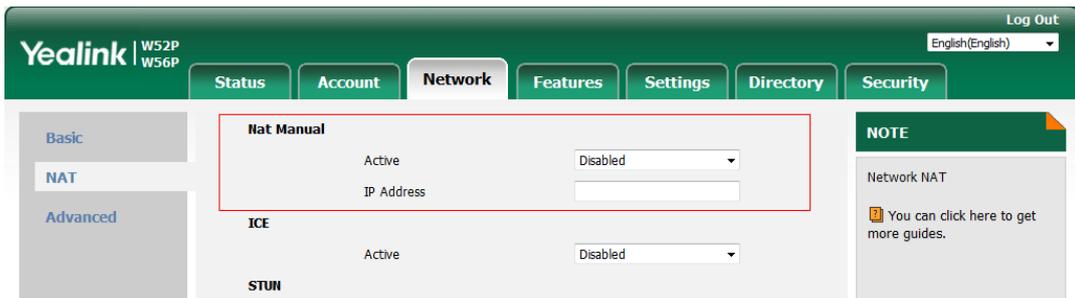

### To configure ICE feature via web user interface:

Click on Network -> NAT

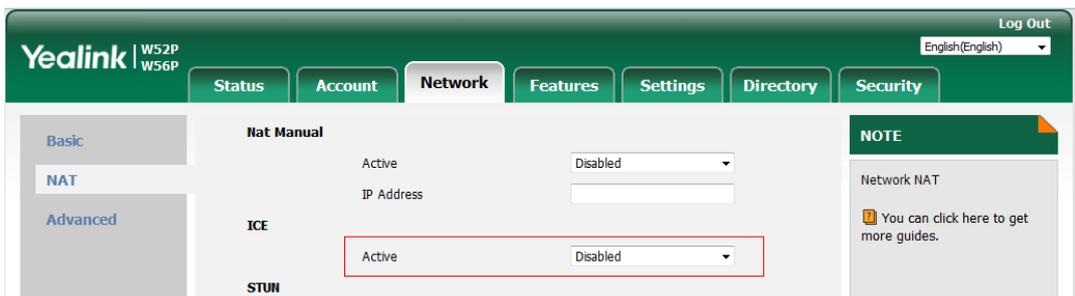

### The parameters in the auto provision template are described as follows:

*ice.enable* =

*sip.nat\_turn.enable* =

*sip.nat\_turn.server* =

*sip.nat\_turn.password* =

*sip.nat\_turn.port* =

## 6. Added the feature of Call Park.

**Description:** Call park allows users to park a call on a special extension and then retrieve it from another phone (for example, a phone in another office or conference room). This feature depends on support from a SIP server. It is not applicable to W52H handset. Call park feature supports the following two modes: FAC mode and Transfer mode.

### To configure call park feature via web user interface:

Click on Features -> Call Pickup

The screenshot shows the Yealink management interface for W52P and W56P models. The 'Features' tab is active, and the 'Call Pickup' configuration is displayed. The configuration fields are: Call Park Mode (FAC), Call Park (Enabled), Call Park Code (\*68), and Park Retrieve Code (\*68). A 'NOTE' section on the right explains the 'Directed Call Pickup' feature, which picks up incoming calls on a specific extension or within a pre-defined group. It also mentions 'Visual Alert for BLF Pickup' and 'Audio Alert for BLF Pickup'.

**The parameters in the auto provision template are described as follows:**

*features.call\_park.park\_mode =*  
*features.call\_park.enable =*  
*features.call\_park.park\_code =*  
*features.call\_park.park\_retrieve\_code =*

## 7. Added the feature of Ringer Device for Headset.

**Description:** The IP DECT phones support speaker and headset ringer devices. The feature of Ringer Device for Headset allows users to configure which ringer device to be used when receiving an incoming call. For example, if the ringer device is set to Headset, ring tone will be played through the connected headset. If the headset is not connected, ring tone will be played through speaker.

**The parameters in the auto provision template are described as follows:**

*features.ringer\_device.is\_use\_headset =*

## 8. Added the feature of Number of Registered Handsets.

**Description:** Number of registered handsets allows you to configure the number of handsets registered to one base. Up to 5 handsets can be registered to one base. You can limit that how many handsets can be registered to one base station.

**The parameters in the auto provision template are described as follows:**

*phone\_setting.max\_number\_of\_handset =*

## 6. Optimization Descriptions

### 1. Optimized the feature of Upgrading Firmware.

**Description:** If you want to perform OTA upgrade via auto provisioning, you can use Handset trigger feature, which allows OTA upgrade for handset to be triggered automatically. It is only applicable when the current handset firmware is different with the one on provisioning server. When the handset is registered to a base or turned on successfully, handset trigger feature forces the handset fulfilling prerequisites to perform OTA upgrade.

**The parameters in the auto provision template are described as follows:**

*over\_the\_air.url.w52h =*

*over\_the\_air.url.w56h =*

### 2. Optimized the feature of Redirection and Provisioning Service (RPS).

**Description:** When you use Redirection and Provisioning Service (RPS), the phone will pop up an authentication window, allowing you to input the authentication information.

### 3. Optimized the feature of Network conference.

**Description:** You can configure the network conference type, Local Conference or Network Conference, manually.

**The parameters in the auto provision template are described as follows:**

*account.X.conf\_type =*

### 4. Optimized the feature of Audio Codec Configuration.

**Description:** Yealink IP phones running firmware version 81 or later support a new configuration behavior for the audio codecs. It is more efficiently for you to provision a number of different IP phone modules. The configuration parameters are different for the new configuration behavior and the older one.

For more information, please refer to the

*Yealink IP DECT Phone Administrator Guide\_V81\_10*

**The parameters in the auto provision template are described as follows:**

*account.X.codec.<payload\_type>.enable =*

*account.X.codec.<payload\_type>.priority =*

*account.X.codec.<payload\_type>.rtpmap =*

## 5. Optimized the feature of Time and Date.

**Description:** Added a new format of date string. For example, if you configure the format as “W,MD”, then the handset will display the date in “Wed,0402”.


**The parameters in the auto provision template are described as follows:**

*lcl.datetime.date.format =*

## 6. Optimized the Status item in the web user interface.

**Description:** Added three items for Status in the web user interface: (1) Device Certificate; (2) Uptime: The duration from start-up to now.

**The web user interface is shown as below:**

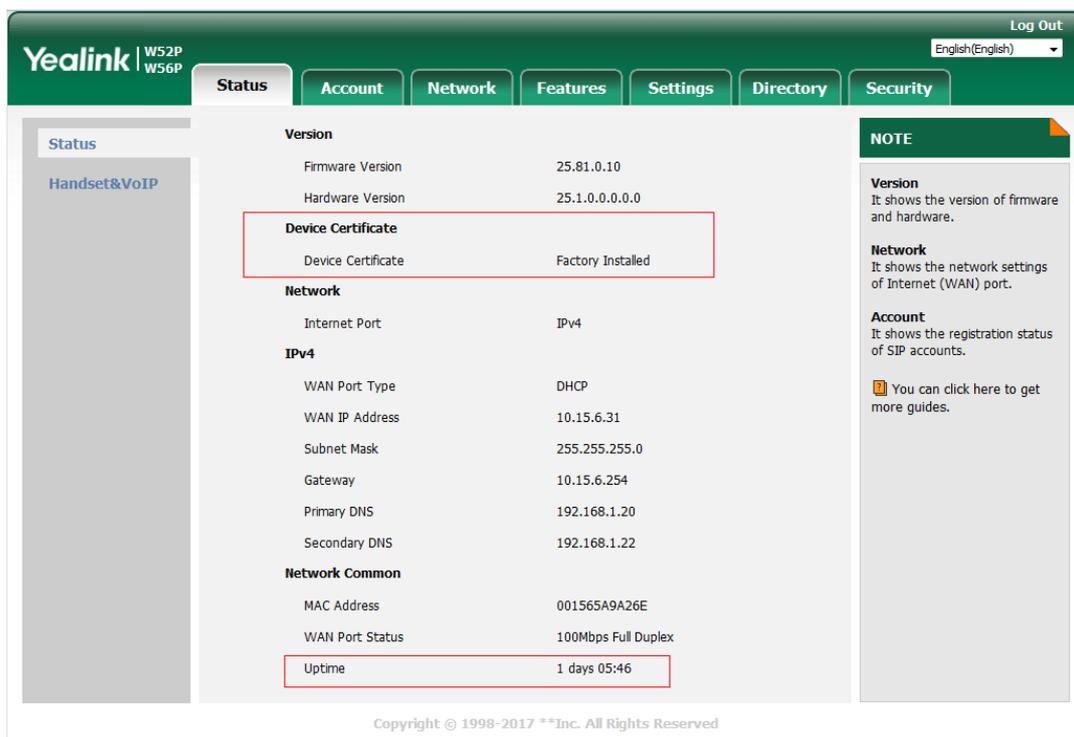

**The parameters in the auto provision template are described as follows:**


*features.display\_method\_on\_dialing =*

## 7. Optimized the feature of Viewing Log Files.

**Description:** In version 81, the log files are divided into local log files (including sys.log file and boot.log file) and syslog files. For the syslog files, (1) you can configure the transport type as UDP, TCP or TLS; (2) you can configure the facility that generates the log messages; (3) you can enable or disable the IP phone to prepend the MAC address to the log messages exported to the syslog server. In addition, you can also configure the IP phone to send syslog messages to a syslog server in real time.


## To export the system log to a local PC via web user interface:

Click on Settings -> Configuration

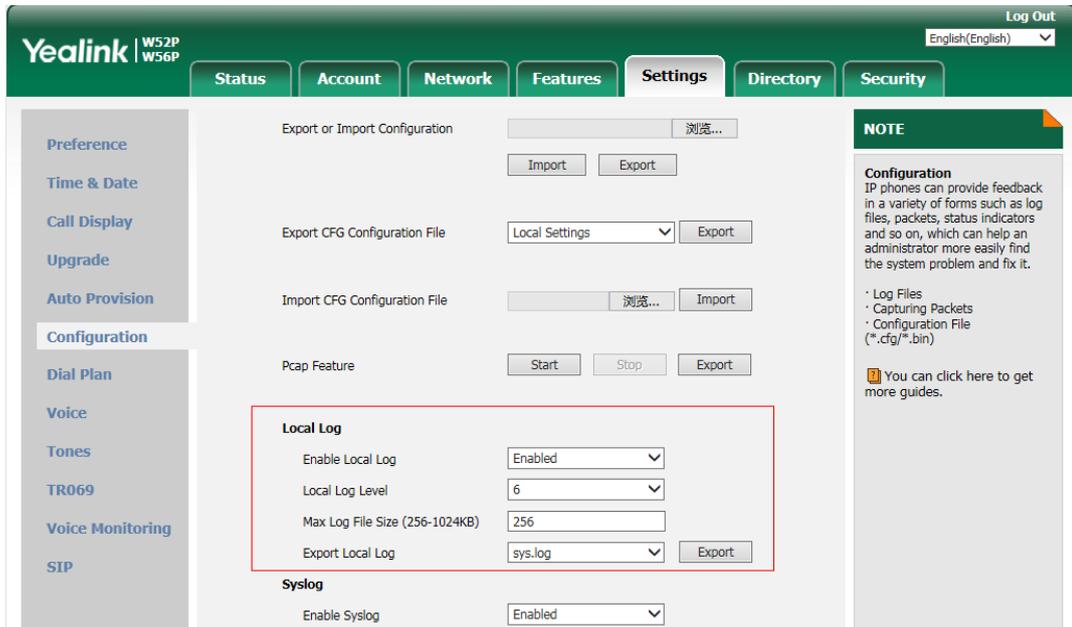

## To configure the phone to export the system log to a syslog server via web user interface:

Click on Settings -> Configuration.

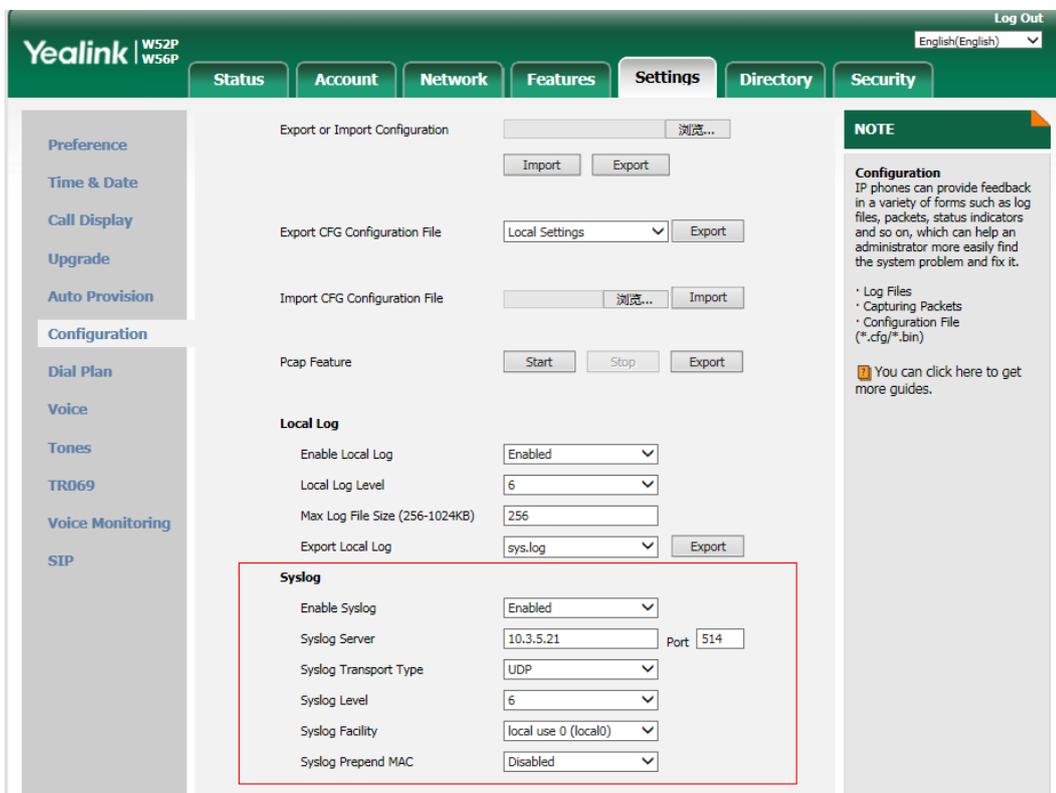

## The parameters in the auto provision template are described as follows:

*static.syslog.enable* =

static.syslog.level =  
 static.syslog.transport\_type =  
 static.syslog.prepend\_mac\_address.enable =  
 static.syslog.facility =  
 static.auto\_provision.local\_log.backup.enable =  
 static.auto\_provision.local\_log.backup.path =  
 static.auto\_provision.local\_log.backup.upload\_period =  
 static.auto\_provision.local\_log.backup.append =  
 static.auto\_provision.local\_log.backup.append.limit\_mode =  
 static.auto\_provision.local\_log.backup.append.max\_file\_size =  
 static.auto\_provision.local\_log.backup.bootlog.upload\_wait\_time =

## 8. Optimized the feature of 802.1X Authentication.

**Description:** (1) Added a mode of Anonymous Identity. (2) If you choose EAP-FAST as 802.1x Mode, you can choose Unauthenticated Provisioning as your Provisioning Mode. (3) You can specify the 802.1X authentication method, where EAP-NONE means no authentication in this new version, same as Disabled in the previous version.

**To configure the 802.1X authentication via web user interface:**

Click on Network -> Advanced.

The screenshot shows the Yealink web user interface for configuring 802.1X authentication. The interface includes a navigation menu with 'Status', 'Account', 'Network', 'Features', 'Settings', 'Directory', and 'Security'. The 'Network' tab is selected, and the 'Advanced' sub-tab is active. The '802.1x' section is highlighted with a red box, showing the following configuration:

- 802.1x Mode: EAP-None
- Provisioning Mode: Unauthenticated Provisioning
- Anonymous Identity: (empty field)
- Identity: (empty field)
- MDS Password: (masked field)
- CA Certificates: (empty field with Upload and Browse... buttons)
- Device Certificates: (empty field with Upload and Browse... buttons)

A 'NOTE' section on the right provides information about VLAN, NAT Traversal, Quality of Service (QoS), and Web Server Type.

## 9. Optimized the feature of Call Waiting.

**Description:** You can set the call waiting mode as Local or XSI. If the mode is configured as XSI, the call waiting status will be synchronized between the IP phone and the BroadWorks server.

**The parameters in the auto provision template are described as follows:**

*call\_waiting.mode =*

## 7. Configuration Parameters Enhancements

Auto Provision Template Flies Change Log							
Firmware Version: [25.80.193.10]-[25.81.193.10]							
Feature	Provisioning syntax Comparison		Permitted Values	Default Value	Action	Description	File
	25.80.193.10	25.81.193.10					
Features_Audio Settings		features.ringer_device.is_use_headset =	0 or 1	0	Add	It configures the ringer device for the IP DECT phone. 0-Use Speaker 1-Use Headset	common.cfg
Upgrade Method		over_the_air.url.w52h =	within 511 characters	Blank	Add	It configures the access URL of the W52H handset firmware file. Example: over_the_air.url.w52h = http://192.168.1.20/26.81.0.1.rom Note: The priority of parameter "over_the_air.url.w52h" is higher than "over_the_air.url".	common.cfg
Upgrade Method		over_the_air.url.w56h =	within 511 characters	Blank	Add	Configures the access URL of the W56H handset firmware file. Example: over_the_air.url.w56h = http://192.168.1.20/61.80.0.1.rom	common.cfg

						Note: The priority of parameter "over_the_air.url.w56h" is higher than "over_the_air.url".	
Call Restriction		account.x.simultaneous_outgoing.num =	1, 2, 3 or 4	4	Add	It configures the number of simultaneous outgoing calls for account X on a base. Note: The IP DECT Phone supports up to 4 simultaneous calls.	MAC.cfg
Handset Restriction		phone_setting.max_number_of_handset =	1, 2, 3, 4 or 5	5	Add	It configures the number of handsets registered to one base.	common.cfg
Time		lcl.datetime.date.format =	String	Blank	Add	It configures the format of date string. Y = year, M = month, D = day, W = day of week Value formats are: - Any combination of W, M, D and the separator (e.g., space, dash, slash). Example: lcl.datetime.date.format = W,MD The IP DECT phone will display the date in "W,MD" format (e.g., Wed,0420). - Any combination of Y, M, D, W and the separator (e.g., space, dash, slash). Example: lcl.datetime.date.format = YYYY-MMM-DDD-WWW The IP DECT phone will display the date in "YYYY-MMM-DDD-WWW" format (e.g., 2016-Apr-20-Wednesday). Note: "Y"/"YY" represents a	MAC.cfg

						two-digit year, more than two "Y" letters (e.g., YYYY) represent a four-digit year, "M"/"MM" represents a two-digit month, "MMM" represents the abbreviation of the month, three or more than three "M" letters (e.g., MMM) represent the long format of the month, one or more than one "D" (e.g., DDD) represents a two-digit day, "W"/"WW" represents the abbreviation of the day of week, three or more than three "W" letters (e.g., WWW) represent the long format of the day of week. It works only if the value of the parameter "auto_provision.handset_configured.enable" is set to 1 (Enabled).	
SIP		<p>sip.requesturi</p> <p>.e164.addglobalprefix =</p>	0 or 1	0	Add	<p>It enables or disables the IP DECT phone to add a global prefix "+" to the E.164 user parts in SIP: URI.</p> <p>0-Disabled</p> <p>1-Enabled</p> <p>If it is set to 1 (Enabled), the IP DECT phone will automatically add a prefix "+" to the number in the E.164 format when you dial using the SIP URI (e.g., 862512345000@sip.com).</p>	common. cfg
Features_ DTMF		<p>features.dtmf</p> <p>.duration =</p>	Integer from 0 to 300	100	Add	<p>It configures the duration time (in milliseconds) for each digit when a sequence of DTMF tones is played out automatically.</p> <p>Note: If the time interval between two DTMF digits is</p>	common. cfg

						less than this value, two or more same DTMF digits could be identified as one DTMF digit. This may cause the loss of one or more DTMF digits. For example, 2662 may be identified as 262. If so, you can modify the value of this parameter to a little lower than the default value.	
Features_ Audio Settings		features.call. dialtone_time_out =	Integer greater than or equal to 0	60	Add	It configures the duration time (in seconds) that a dial tone plays before a call is dropped.  Example: features.call.dialtone_time_out = 30  The IP phone will stop playing the dial tone in 30 seconds when on the dialing screen and return back to the idle screen.  If it is set to 0, the call is not dropped.	common. cfg
Autop_ Protect		static.auto_provision. custom_protect =	0 or 1	0	Add	It enables or disables the IP DECT phone to protect personalized settings after auto provisioning.  0-Disabled 1-Enabled  If it is set to 1 (Enabled), <MAC>-local.cfg file generates and personalized non-static settings configured via web or handset user interface will be kept after auto provisioning.  Note: The provisioning priority mechanism (handset/web user	common. cfg

						interface >central provisioning >factory defaults) takes effect only if the value of this parameter is set to 1 (Enabled). If the value of the parameter "overwrite_mode" is set to 1 in the boot file, the value of this parameter will be forced to set to 1 (Enabled).	
802.1X		static.network.802_1x.anonymous_identity =	String within 512 characters	Blank	Add	<p>It configures the anonymous identity (user name) for 802.1X authentication.</p> <p>It is used for constructing a secure tunnel for 802.1X authentication.</p> <p>Example: static.network.802_1x.anonymous_identity = user@yealink.com</p> <p>Note: It works only if the value of the parameter "static.network.802_1x.mode" is set to 2, 3, 4, 5, 6 or 7.</p>	common.cfg
802.1X		static.network.802_1x.eap_fast_provision_mode =	0 or 1	0	Add	<p>It configures the EAP In-Band provisioning method for EAP-FAST.</p> <p>0-Unauthenticated Provisioning 1-Authenticated Provisioning</p> <p>If it is set to 0 (Unauthenticated Provisioning), EAP In-Band provisioning is enabled by server unauthenticated PAC (Protected Access Credential) provisioning using anonymous Diffie-Hellman key exchange.</p> <p>If it is set to 1</p>	common.cfg

						(Authenticated Provisioning), EAP In-Band provisioning is enabled by server authenticated PAC provisioning using certificate based server authentication.  Note: It works only if the value of the parameter "static.network.802_1x.mode" is set to 7 (EAP-FAST).	
Syslog		static.local_log.enable =	0 or 1	1	Add	<p>It enables or disables the IP DECT phone to record log locally.</p> <p>0-Disabled 1-Enabled</p> <p>If it is set to 0 (Disabled), the IP DECT phone will stop recording log to the log files (&lt;MAC&gt;-boot.log and &lt;MAC&gt;-sys.log) locally. The log files recorded before are still kept on the phone.</p> <p>If it is set to 1 (Enabled), the IP DECT phone will continue to record log to the log files (&lt;MAC&gt;-boot.log and &lt;MAC&gt;-sys.log) locally. You can export the local log files to the provisioning server or a specific server or the local system.</p> <p>Note: We recommend you not to disable this feature.</p>	common.cfg
Syslog		static.local_log.level =	Integer from 0 to 6	3	Add	<p>It configures the lowest level of local log information to be rendered to the &lt;MAC&gt;-sys.log file.</p> <p>When you choose a log level, you are including all events of an equal or higher severity level and excluding events of a lower severity</p>	common.cfg

						<p>level. The logging level you choose determines the lowest severity of events to log.</p> <p>0-system is unusable</p> <p>1-action must be taken immediately</p> <p>2-critical condition</p> <p>3-error conditions</p> <p>4-warning conditions</p> <p>5-normal but significant condition</p> <p>6-informational</p>	
Syslog		static.local_log.max_file_size =	Integer from 256 to 1024	256	Add	<p>It configures the maximum size (in KB) of the log files (&lt;MAC&gt;-boot.log and &lt;MAC&gt;-sys.log) can be stored on the IP DECT phone.</p> <p>When this size is about to be exceeded,</p> <p>(1) If the local log files are configured to be uploaded to the server by the parameter "static.auto_provision.local_log.backup.enable", the IP DECT phone will clear all the local log files on the phone once successfully backing up.</p> <p>(2) If the value of the parameter "static.auto_provision.local_log.backup.enable" is set to 0 (Disabled), the IP DECT phone will erase half of the logs from the oldest log information on the phone.</p> <p>Example: static.local_log.max_file_size</p>	common.cfg

						e = 1024	
Syslog		static.syslog.enable =	0 or 1	0	Add	It enables or disables the IP DECT phone to upload log messages to the syslog server in real time.  0-Disabled 1-Enabled	common. cfg
Syslog		static.syslog.level =	Integer from 0 to 6	3	Add	It configures the lowest level of syslog information that displays in the syslog.  When you choose a log level, you are including all events of an equal or higher severity level and excluding events of a lower severity level. The logging level you choose determines the lowest severity of events to log.  0-Emergency: system is unusable 1-Alert: action must be taken immediately 2-Critical: critical conditions 3-Critical: error conditions 4-Warning: warning conditions 5-Warning: normal but significant condition 6-Informational: informational messages	common. cfg
Syslog		static.syslog.transport_type =	0, 1 or 2	0	Add	It configures the transport protocol that the IP DECT phone uses when exporting log messages to the syslog server.  0-UDP 1-TCP 2-TLS	common. cfg
Syslog		static.syslog.	0 or 1	0	Add	It enables or disables the IP	common.

		prepend_mac_address.enable =				DECT phone to prepend the MAC address to the log messages exported to the syslog server.  0-Disabled 1-Enabled	cfg
Syslog		static.syslog.facility =	Integer from 0 or 23	16	Add	It configures the facility that generates the log messages. 0-kernel messages 1-user-level messages 2-mail system 3-system daemons 4-security/authorization messages (note 1) 5-messages generated internally by syslogd 6-line printer subsystem 7-network news subsystem 8-UUCP subsystem 9-clock daemon (note 2) 10-security/authorization messages (note 1) 11-FTP daemon 12-NTP subsystem 13-log audit (note 1) 14-log alert (note 1) 15-clock daemon (note 2) 16-local use 0 (local0) 17-local use 1 (local1) 18-local use 2 (local2) 19-local use 3 (local3) 20-local use 4 (local4) 21-local use 5 (local5) 22-local use 6 (local6) 23-local use 7 (local7)  Note: For more information, refer to RFC 3164.	common. cfg
Syslog		static.auto_p	0 or 1	0	Add	It enables or disables the IP	common.

		<p>rovision.local_log.backup.enable =</p>				<p>DECT phone to upload the local log files (&lt;MAC&gt;-boot.log and &lt;MAC&gt;-sys.log) to the provisioning server or a specific server.</p> <p>0-Disabled 1-Enabled</p> <p>If it is set to 1 (Enabled), the IP phone will upload the local log files to the provisioning server or the specific server to back up these files when one of the following happens:</p> <ul style="list-style-type: none"> <li>- Auto provisioning is triggered;</li> <li>- The size of the local log files reaches maximum configured by the parameter "static.local_log.max_file_size";</li> <li>- It's time to upload local log files according to the upload period configured by the parameter "static.auto_provision.local_log.backup.upload_period".</li> </ul> <p>Note: The upload path is configured by the parameter "static.auto_provision.local_log.backup.path".</p>	cfg
Syslog		<p>static.auto_provision.local_log.backup.path =</p>	<p>URL within 1024 characters</p>	Blank	Add	<p>It configures the upload path of the local log files (&lt;MAC&gt;-boot.log and &lt;MAC&gt;-sys.log).</p> <p>If you leave it blank, the IP DECT phone will upload the local log files to the provisioning server.</p> <p>If you configure a relative URL (e.g., /upload), the IP</p>	common.cfg

						<p>DECT phone will upload the local log files by extracting the root directory from the access URL of the provisioning server.</p> <p>If you configure an absolute URL with protocol (e.g., tftp), the IP DECT phone will upload the local log files using the desired protocol. If no protocol, the IP DECT phone will use the same protocol with auto provisioning for uploading files.</p> <p>Example: static.auto_provision.local_log.backup.path = tftp://10.3.6.133/upload/</p> <p>Note: It works only if the value of the parameter "static.auto_provision.local_log.backup.enable" is set to 1 (Enabled).</p>	
Syslog		static.auto_provision.local_log.backup.upload_period =	Integer from 30 to 86400	30	Add	<p>It configures the period (in seconds) of the local log files (&lt;MAC&gt;-boot.log and &lt;MAC&gt;-sys.log) uploads to the provisioning server or a specific server.</p> <p>Example: static.auto_provision.local_log.backup.upload_period = 60</p> <p>Note: It works only if the value of the parameter "static.auto_provision.local_log.backup.enable" is set to 1 (Enabled).</p>	common.cfg
Syslog		static.auto_provision.local_log.backup.	0 or 1	1	Add	<p>It configures whether the local log files (&lt;MAC&gt;-boot.log and</p>	common.cfg

		append =				<MAC>-sys.log) on the provisioning server or a specific server are overwritten or appended.  0-Overwrite 1-Append (not applicable to TFTP Server)	
Syslog		static.auto_provision.local_log.backup.append.limit_mode =	0 or 1	0	Add	It configures the behavior when local log files (<MAC>-boot.log and <MAC>-sys.log) on the provisioning server or a specific server reach the maximum size.  0-Append Delete 1-Append Stop  If it is set to 1 (Append Delete), the IP DECT phone will delete the old log and start over.  If it is set to 2 (Append Stop), the IP DECT phone will stop uploading log.	common.cfg
Syslog		static.auto_provision.local_log.backup.append.max_file_size =	Integer from 200 to 65535	1024	Add	It configures the maximum size (in KB) of the local log files (<MAC>-boot.log and <MAC>-sys.log) can be stored on the provisioning server or a specific server.  Example: static.auto_provision.local_log.backup.append.max_file_size = 1025	common.cfg
Syslog		static.auto_provision.local_log.backup.bootlog.upload_wait_time =	Integer from 1 to 86400	120	Add	It configures the waiting time (in seconds) before the phone uploads the local log file (<MAC>-boot.log) to the provisioning server or a specific server after startup.  Example: static.auto_provision.local_l	common.cfg

						og.backup.bootlog.upload_wait_time = 121	
AutoP-Flexible		static.auto_provision.flexible.enable =	0 or 1	0	Add	<p>It triggers the flexible feature to on or off.</p> <p>0-Off 1-On</p> <p>If it is set to 1 (On), the IP DECT phone will perform an auto provisioning process at random between a starting time configured by the parameter "static.auto_provision.flexible.begin_time" and an ending time configured by the parameter "static.auto_provision.flexible.end_time" on a random day within the period configured by the parameter "static.auto_provision.flexible.Interval".</p> <p>Note: The day within the period is decided based upon the phone's MAC address and does not change with a reboot whereas the time within the start and end is calculated again with every reboot.</p>	common.cfg
AutoP-Flexible		static.auto_provision.flexible.interval =	Integer from 1 to 1000	1	Add	<p>It configures the interval (in days) for the IP DECT phone to perform an auto provisioning process.</p> <p>The auto provisioning occurs on a random day within this period based on the phone's MAC address.</p> <p>Example: static.auto_provision.flexible</p>	common.cfg

						<p>e.interval = 30</p> <p>The IP DECT phone will perform an auto provisioning process on a random day (e.g., 18) based on the phone's MAC address.</p> <p>Note: It works only if the value of the parameter "static.auto_provision.flexible.enable" is set to 1 (On).</p>	
AutoP-Flexible		static.auto_provision.flexible.begin_time =	Time from 00:00 to 23:59	02:00	Add	<p>It configures the starting time of the day for the IP DECT phone to perform an auto provisioning process at random.</p> <p>Note: It works only if the value of the parameter "static.auto_provision.flexible.enable" is set to 1 (On).</p>	common.cfg
AutoP-Flexible		static.auto_provision.flexible.end_time =	Time from 00:00 to 23:59	Blank	Add	<p>It configures the ending time of the day for the IP DECT phone to perform an auto provisioning process at random.</p> <p>If it is left blank or set to a specific value equal to starting time configured by the parameter "static.auto_provision.weekly.begin_time", the IP DECT phone will perform an auto provisioning process at the starting time.</p> <p>If it is set to a specific value greater than starting time configured by the parameter "static.auto_provision.weekly.begin_time", the IP DECT phone will perform an auto provisioning process at random between the</p>	common.cfg

						<p>starting time and ending time.</p> <p>If it is set to a specific value less than starting time configured by the parameter "static.auto_provision.weekly.begin_time", the IP DECT phone will perform an auto provisioning process at random between the starting time on that day and ending time in the next day.</p> <p>Note: It works only if the value of the parameter "static.auto_provision.flexible.enable" is set to 1 (On).</p>	
AutoP_DHCP		static.network.dhcp.option60type =	0 or 1	0	Add	<p>It configures the DHCP option 60 type.</p> <p>0-ASCII 1-Binary</p> <p>If it is set to 0 (ASCII), the vendor-identifying information is in ASCII format.</p> <p>If it is set to 1 (Binary), the vendor-identifying information is in the format defined in RFC 3925.</p>	common.cfg
Autop Provisioning		static.auto_provision.attempt_before_failed =	Integer from 1 to 10	3	Add	<p>It configures the maximum number of attempts to transfer a file before the transfer fails.</p> <p>Example: static.auto_provision.attempt_before_failed = 5</p>	common.cfg
Autop Provisioning		static.auto_provision.retry_delay_after_file_transfer_failed =	Integer from 1 to 300	5	Add	<p>It configures the time (in seconds) to wait after a file transfer fails before retrying the transfer via auto provisioning.</p>	common.cfg

						Example: static.auto_provision.retry_delay_after_file_transfer_failed = 5	
Autop_Protect		static.auto_provision.custom.sync.path =	URL	Blank	Add	It configures the URL for uploading/downloading the <MAC>-local.cfg file. If it is left blank, the IP DECT phone will try to upload/download the <MAC>-local.cfg file to/from the root directory of provisioning server. Note: It works only if the value of the parameter "static.auto_provision.custom.sync" is set to 1 (Enabled).	common.cfg
Autop Provisioning		static.auto_provision.server.type =	FTP, TFTP, HTTP or HTTPS	TFTP	Add	It configures the protocol the IP DECT phone uses to connect to the provisioning server. Note: It works only if the protocol type is not defined in the access URL of the provisioning server configured by the parameter "static.auto_provision.server.url".	common.cfg
Autop Provisioning		static.auto_provision.user_agent_mac.enable =	0 or 1	1	Add	It enables or disables the IP DECT phone's MAC address to be included in the User-Agent header of HTTP/HTTPS transfers via auto provisioning. 0-Disabled 1-Enabled If it is set to 0 (Disabled), the phone's MAC address is not included in the User-Agent header of HTTP/HTTPS	common.cfg

						transfers and communications to the web browser.	
Autop_Aes Key		auto_provision.update_file_mode =	0 or 1	0	Add	<p>It enables or disables the IP phone only to download the encrypted files.</p> <p>0-Disabled 1-Enabled</p> <p>If it is set to 0 (Disabled), the IP DECT phone will download the configuration files (e.g., sip.cfg, account.cfg, &lt;MAC&gt;-local.cfg) file from the server during auto provisioning no matter whether the files are encrypted or not. And then resolve these files and update settings onto the IP DECT phone system.</p> <p>If it is set to 1 (Enabled), the IP phone will only download the encrypted configuration files (e.g., sip.cfg, account.cfg, &lt;MAC&gt;-local.cfg) or &lt;MAC&gt;-contact.xml file from the server during auto provisioning, and then resolve these files and update settings onto the IP phone system</p>	common.cfg
NAT&ICE		sip.nat_turn.enable =	0 or 1	0	Add	<p>It enables or disables the TURN (Traversal Using Relays around NAT) feature on the IP DECT phone.</p> <p>0-Disabled 1-Enabled</p>	common.cfg
NAT&ICE		sip.nat_turn.server =	IP address or domain name	Blank	Add	It configures the IP address or the domain name of the TURN (Traversal Using	common.cfg

						Relays around NAT) server. Example: sip.nat_turn.server = 218.107.220.202 Note: It works only if the value of the parameter “sip.nat_turn.enable” is set to 1 (Enabled).	
NAT&ICE		sip.nat_turn. username =	String	Blank	Add	It configures the user name to authenticate to TURN (Traversal Using Relays around NAT) server. Example: sip.nat_turn.username = admin Note: It works only if the value of the parameter “sip.nat_turn.enable” is set to 1 (Enabled).	common. cfg
NAT&ICE		sip.nat_turn. port =	Integer from 1 to 65535	3478	Add	It configures the port of the TURN (Traversal Using Relays around NAT) server. Example: sip.nat_turn.port = 3478 Note: It works only if the value of the parameter “sip.nat_turn.enable” is set to 1 (Enabled).	common. cfg
AutoP_Weekly		static.auto_p rovision.week ly_upgrade_i nterval =	Integer from 0 to 12	1	Add	It configures the period for the IP DECT phone to perform an auto provisioning. If it is set to 0, the IP DECT phone will perform an auto provisioning process during the specified time period (configured by the parameters “static.auto_provision.weekl y.begin_time” and “static.auto_provision.weekl	common. cfg

						<p>y.end_time”) of the day(s) (configured by the parameter static.auto_provision.weekly.dayofweek) every week.</p> <p>If it is set to to other values (e.g., 2), the IP DECT phone will perform an auto provisioning process during the specified time period (configured by the parameters “static.auto_provision.weekly.begin_time” and “static.auto_provision.weekly.end_time”) at a random day of the specified day(s) (configured by the parameter static.auto_provision.weekly.dayofweek) every 2 weeks.</p> <p>Note: It works only if the value of the parameter “static.auto_provision.weekly.enable” is set to 1 (On). Week here means from Sunday to Saturday, for example, today is Thursday (Dec. 22), the first week starts from Sunday (Dec. 25) to this Saturday (Dec. 31).</p>	
AutoP_Weekly		static.auto_provision.inactivity_time_expire =	Integer from 0 to 120	0	Change	<p>It configures the delay time (in minutes) to perform an auto provisioning process when the IP DECT phone is inactive at regular week.</p> <p>If it is set to 0, the IP phone will perform an auto provisioning process at random during the time period (configured by the parametera “static.auto_provision.weekly</p>	common.cfg

						<p>y.begin_time” and “static.auto_provision.weekly.end_time”).</p> <p>If it is set to other values (e.g., 60), the IP phone will perform an auto provisioning process only when the IP phone has been inactivated for 60 minutes (1 hour) during the time period (configured by the parameters “static.auto_provision.weekly.begin_time” and “static.auto_provision.weekly.end_time”).</p> <p>Note: The auto provisioning may be performed during normal working hours when the IP phone has been inactivated for the designated time between the starting time and ending time. It works only if the value of the parameter “static.auto_provision.weekly.enable” is set to 1 (On). Week here means from Sunday to Saturday, for example, today is Thursday (Dec. 22), the first week starts from Sunday (Dec. 25) to this Saturday (Dec. 31).</p>	
Autop_Aes Key		static.auto_provision.encryption.config =	0 or 1	0	Add	<p>It enables or disables the IP DECT phone to encrypt &lt;MAC&gt;-local.cfg file using the plaintext AES key.</p> <p>0-Disabled 1-Enabled</p> <p>If it is set to 0 (Disabled), the MAC-local CFG file will be uploaded unencrypted and replace the one (encrypted</p>	common.cfg

						<p>or unencrypted) stored on the server if you have configured to back up the MAC-local CFG file to the server by the parameter "static.auto_provision.custom.sync".</p> <p>If it is set to 1 (Enabled), the MAC-local CFG file will be uploaded encrypted and will replace the one (encrypted or unencrypted) stored on the server if you have configured to back up the MAC-local CFG file to the server by the parameter "static.auto_provision.custom.sync". The plaintext AES key is configured by the parameter "static.auto_provision.aes_key_16.mac".</p>	
Autop Provisioning		static.auto_provision.dns_resolv_nosys =	0 or 1	1	Add	<p>It enables or disables the IP DECT phone to resolve the access URL of the provisioning server using download libraries mechanism.</p> <p>0-Disabled 1-Enabled</p> <p>If it is set to 0 (Disabled), the IP DECT phone resolves the access URL of the provisioning server using system mechanism.</p>	common.cfg
Autop Provisioning		static.auto_provision.dns_resolv_nretry =	Integer from 1 to 10	2	Add	<p>It configures the retry times when the IP DECT phone fails to resolve the access URL of the provisioning server.</p> <p>Note: For each different DNS server, it works only if the</p>	common.cfg

						value of the parameter "static.auto_provision.dns_resolv_nosys" is set to 1 (Enabled).	
Autop Provisioning		static.auto_provision.dns_resolv_timeout =	Integer from 1 to 60	5	Add	It configures the timeout (in seconds) for the phone to retry to resolve the access URL of the provisioning server.  Note: For each different DNS server, it works only if the value of the parameter "static.auto_provision.dns_resolv_nosys" is set to 1 (Enabled).	common.cfg
Multicast		multicast.receive_priority_enable =	0 or 1	1	Add	It enables or disables the IP DECT phone to handle the incoming multicast paging calls when there is an active multicast paging call on the IP DECT phone.  0-Disabled 1-Enabled  If it is set to 0 (Disabled), the IP DECT phone will ignore the incoming multicast paging calls when there is an active multicast paging call on the IP DECT phone.  If it is set to 1 (Enabled), the IP DECT phone will receive the incoming multicast paging call with a higher priority and ignore that with a lower priority.	common.cfg
Multicast		multicast.receive_priority_priority =	Integer from 0 to 31	31	Add	It configures the priority of the voice call (a normal phone call rather than a multicast paging call) in progress.  1 is the highest priority, 31 is	common.cfg

						<p>the lowest priority.</p> <p>0-Disabled</p> <p>1-1</p> <p>2-2</p> <p>3-3</p> <p>4-4</p> <p>5-5</p> <p>6-6</p> <p>7-7</p> <p>8-8</p> <p>9-9</p> <p>10-10</p> <p>11-11</p> <p>12-12</p> <p>13-13</p> <p>14-14</p> <p>15-15</p> <p>16-16</p> <p>17-17</p> <p>18-18</p> <p>19-19</p> <p>20-20</p> <p>21-21</p> <p>22-22</p> <p>23-23</p> <p>24-24</p> <p>25-25</p> <p>26-26</p> <p>27-27</p> <p>28-28</p> <p>29-29</p> <p>30-30</p> <p>31-31</p> <p>If it is set to 0 (Disabled), all incoming multicast paging calls will be automatically ignored when a voice call is</p>	
--	--	--	--	--	--	--	--

						<p>in progress.</p> <p>If it is not set to 0(Disabled), the IP DECT phone will receive the incoming multicast paging call with a higher or same priority than this value and ignore that with a lower priority than this value when a voice call is in progress.</p>	
Multicast		<p>multicast.listen_address.X.channel =</p>	<p>Integer from 0 to 30</p>	0	Add	<p>It configures the channel that the IP DECT phone listens to.</p> <p>If it is set to 0, the IP DECT phone can receive an RTP stream of the pre-configured multicast address from the IP DECT phones running firmware version 80 or prior, from the IP DECT phones listen to the channel 0, or from the available third-party devices (e.g., Cisco IP phones).</p> <p>If it is set to 1 to 25, the IP phone can receive an RTP stream of the pre-configured multicast address on the channel 1 to 25 respectively from Yealink or Polycom IP DECT phones.</p> <p>It is set to 26 to 30, the IP phone can receive the RTP stream of the pre-configured multicast address on the channel 26 to 30 respectively from Yealink IP DECT phones.</p> <p>Example: multicast.listen_address.1.channel = 2</p>	common.cfg
Multicast		multicast.list	String within	Blank	Add	It configures the label to be	common.

		en_address.X .label =	99 characters			displayed on the LCD screen when receiving the multicast paging calls.  Example: multicast.listen_address.1.label = Paging1	cfg
Multicast		multicast.listen_address.X .ip_address =	IP address: port	Blank	Add	It configures the multicast address and port number that the IP phone listens to.  Example: multicast.listen_address.1.ip_address = 224.5.6.20:10008  Note: The valid multicast IP addresses range from 224.0.0.0 to 239.255.255.255.	common. cfg
Multicast		multicast.paging_address.X.channel =	Integer from 0 to 30	0	Add	It configures the channel of the multicast paging group in the paging list.  If it is set to 0, all the Yealink IP DECT phones running firmware version 80 or prior or Yealink IP DECT phones listens to channel 0 or third-party available devices (e.g., Cisco IP phones) in the paging group can receive the RTP stream.  If it is set to 1 to 25, the Polycom or Yealink IP DECT phones preconfigured to listen to the channel can receive the RTP stream.  It is set to 26 to 30, the Yealink IP DECT phones preconfigured to listen to the channel can receive the RTP stream.  Example: multicast.paging_address.1.	common. cfg

						channel = 3 multicast.paging_address.2. channel = 5	
Multicast		multicast.paging_address.X.ip_address =	String	Blank	Add	<p>It configures the IP address and port number of the multicast paging group in the paging list. It will be displayed on the LCD screen when placing the multicast paging call.</p> <p>Example:</p> <p>multicast.paging_address.1.ip_address = 224.5.6.20:10008</p> <p>multicast.paging_address.2.ip_address = 224.1.6.25:1001</p> <p>Note: The valid multicast IP addresses range from 224.0.0.0 to 239.255.255.255.</p>	common.cfg
Multicast		multicast.list_en_address.X.label =	String	Blank	Add	<p>It configures the IP address and port number of the multicast paging group in the paging list. It will be displayed on the LCD screen when placing the multicast paging call.</p> <p>Example:</p> <p>multicast.paging_address.1.ip_address = 224.5.6.20:10008</p> <p>multicast.paging_address.2.ip_address = 224.1.6.25:1001</p> <p>Note: The valid multicast IP addresses range from 224.0.0.0 to 239.255.255.255.</p>	common.cfg
Multicast		multicast.codec =	PCMU, PCMA,	G722	Add	It configures the codec for multicast paging.	common.cfg

			G729, G722			Example: multicast.codec = G722	
Emergency Dialplan		dialplan.emergency.asserted_id_source =	ELIN or CUSTOM	ELIN	Add	<p>It configures the precedence of source of emergency outbound identities when placing an emergency call.</p> <p>If it is set to ELIN, the outbound identity used in the P-Asserted-Identity (PAI) header of the SIP INVITE request is taken from the network using an LLDP-MED Emergency Location Identifier Number (ELIN).</p> <p>The custom outbound identity configured by “dialplan.emergency.custom_asserted_id” will be used if the phone fails to get the LLDP-MED ELIN value.</p> <p>If it is set to CUSTOM, the custom outbound identity configured by “dialplan.emergency.custom_asserted_id” will be used; if the value of the parameter “dialplan.emergency.custom_asserted_id” is left blank, the LLDP-MED ELIN value will be used.</p> <p>Note: If the obtained ELIN value is blank and no custom outbound identity, the PAI header will not be included in the SIP INVITE request.</p>	common.cfg
Emergency Dialplan		dialplan.emergency.custom_asserted_id =	10-25 digits, SIP URI, or TEL URI	Blank	Add	<p>It configures the custom outbound identity when placing an emergency call.</p> <p>If using a TEL URI, for example, tel:+16045558000. The full URI is included in</p>	common.cfg

						<p>the P-Asserted-Identity (PAI) header (e.g., &lt;tel:+16045558000&gt;).</p> <p>If using a SIP URI, for example, sip:1234567890123@abc.com. The full URI is included in the P-Asserted-Identity (PAI) header and the address will be replaced by the emergency server (e.g., &lt;sip:1234567890123@emergency.com&gt;).</p> <p>If using a 10-25 digit number, for example, 1234567890. The SIP URI constructed from the number and SIP server (e.g., abc.com) is included in the P-Asserted-Identity (PAI) header (e.g., &lt;sip:1234567890@abc.com&gt;).</p>	
Emergency Dialplan		dialplan.emergency.server.X.address = (X ranges from 1 to 3)	IP address or domain name	Blank	Add	<p>It configures the IP address or domain name of the emergency server X to be used for routing calls.</p> <p>Note: If the account is registered successfully or failed (the account information has been configured), the emergency calls will be dialed using the following priority: SIP server&gt;emergency server; if the account is not registered, the emergency server will be used.</p>	common.cfg
Emergency Dialplan		dialplan.emergency.server.X.port = (X ranges from 1 to 3)	Integer from 1 to 65535	5060	Add	<p>It configures the port of emergency server X to be used for routing calls.</p>	common.cfg

Emergency Dialplan		dialplan.emergency.server.X.transport_type = (X ranges from 1 to 3)	0, 1, 2 or 3	0	Add	It configures the transport method the IP DECT phone uses to communicate with the emergency server X.  0-UDP 1-TCP 2-TLS 3-DNS-NAPTR	common.cfg
Emergency Dialplan		dialplan.emergency.X.value = (X ranges from 1 to 255)	number or SIP URI	When X = 1, the default value is 911; When X = 2-255, the default value is Blank.	Add	It configures the emergency number to use on your IP DECT phone so a caller can contact emergency services in the local area when required.	common.cfg
Emergency Dialplan		dialplan.emergency.X.server_priority = (X ranges from 1 to 255)	a combination of digits 1, 2 and 3	0	Add	It configures the priority for the emergency servers to be used.  The digits are separated by commas. The servers to be used in the order listed (left to right).  The IP DECT phone tries to send the INVITE request to the emergency server with higher priority. If the emergency server with higher priority does not respond correctly to the INVITE, then the phone tries to make the call using the emergency server with lower priority, and so forth. The IP phone tries to send the INVITE request to each emergency server for three times.  Example:	common.cfg

						<p>dialplan.emergency.1.server _priority = 2, 1, 3</p> <p>It means the IP DECT phone sends the INVITE request to the emergency server 2 first. If the emergency server 2 does not respond correctly to the INVITE, then tries to make the call using the emergency server 1. If the emergency server 1 does not respond correctly to the INVITE, then tries to make the call using the emergency server 3. The IP DECT phone tries to send the INVITE request to each emergency server for three times.</p> <p>Note: If the IP address of the emergency server with higher priority has not been configured, the emergency server with lower priority will be used. If the account is registered successfully or failed (the account information has been configured), the emergency calls will be dialed using the following priority: SIP server&gt;emergency server; if the account is not registered, the emergency server will be used.</p>	
LED		<p>phone_settin g.missed_call _power_led_ flash.enable =</p>	0 or 1	1	Add	<p>It enables or disables the handset power indicator LED to flash when the handset misses a call.</p> <p>0-Disabled (handset power indicator LED does not flash) 1-Enabled (handset power indicator LED slow flashes (1000ms) red)</p>	common. cfg

Audio Codec		account.X.codec.<payload_type>.enable = (where <payload_type> should be replaced by the name of audio codec)	0 or 1	When audio codec is G722, the default value is 1; When audio codec is PCMU, the default value is 1; When audio codec is PCMA, the default value is 1; When audio codec is iLBC, the default value is 0; When audio codec is G726-32, the	Add	It enables or disables the specified audio codec for account X. 0-Disabled 1-Enabled Valid Audio Codec: G722, PCMU, PCMA, G729, iLBC, G726-32, G723_63, G723_53. Example: account.1.codec.g722.enable = 1 account.1.codec.pcmu.enable = 1 account.1.codec.pcma.enable = 1 account.1.codec.g729.enable = 1 account.1.codec.ilbc.enable = 0 account.1.codec.g726-32.enable = 0 account.1.codec.g723_63.enable = 0 account.1.codec.g723_53.enable = 0 Note: The name of audio codec in this parameter should be the correct one as listed in the above example, otherwise the corresponding configuration will not take effect.	MAC.cfg
-------------	--	---	--------	--	-----	--	---------

				<p>default value is 0; When audio codec is G723_63, the default value is 0; When audio codec is G723_53, the default value is 0;</p>			
Audio Codec		<p>account.X.codec.&lt;payload_type&gt;.priority = (where &lt;payload_type&gt; should be replaced by the name of audio codec)</p>	<p>Integer from 0 to 8</p>	<p>When audio codec is G722, the default value is 1; When audio codec is PCMU, the default value is 2; When audio codec is PCMA, the default value is 3; When</p>	Add	<p>It configures the priority of the enabled audio codec for account X.</p> <p>Valid Audio Codec: G722, PCMU, PCMA, G729, iLBC, G726-32, G723_63, G723_53.</p> <p>Example: account.1.codec.g722.priority = 1 account.1.codec.pcmu.priority = 2 account.1.codec.pcma.priority = 3 account.1.codec.g729.priority = 4</p> <p>Note: The priority of codec in disable codec list is not specified, and numerical value 1 is defined as the highest priority in the enable codec list. The name of audio codec in this</p>	MAC.cfg

				<p>audio codec is G729, the default value is 4; When audio codec is G726_32, the default value is 0; When audio codec is iLBC, the default value is 0; When audio codec is G723_53, the default value is 0; When audio codec is G723_63, the default value is 0;</p>		<p>parameter should be the correct one as listed in the above example, otherwise the corresponding configuration will not take effect.</p>	
NAT&ICE		<p>sip.nat_stun.enable =</p>	0 or 1	0	Add	<p>It enables or disables the STUN (Simple Traversal of UDP over NATs) feature on the IP DECT phone. 0-Disabled</p>	common.cfg

						1-Enabled	
NAT&ICE		sip.nat_stun. server =	IP address or domain name	Blank	Add	It configures the IP address or domain name of the STUN (Simple Traversal of UDP over NATs) server.  Example: sip.nat_stun.server = 218.107.220.201  Note: It works only if the value of the parameter "sip.nat_stun.enable" is set to 1 (Enabled).	common. cfg
NAT&ICE		sip.nat_stun. port =	Integer from 1024 to 65000	3478	Add	It configures the port of the STUN (Simple Traversal of UDP over NATs) server.  Example: sip.nat_stun.port = 3478  Note: It works only if the value of the parameter "sip.nat_stun.enable" is set to 1 (Enabled).	common. cfg
NAT&ICE		network.stati c_nat.enable =	0 or 1	0	Add	It enables or disables the manual NAT feature on the IP DECT phone.  0-Disabled 1-Enabled	common. cfg
NAT&ICE		network.stati c_nat.addr =	IP address	Blank	Add	It configures the IP address to be advertised in SIP signaling.  It should match the external IP address used by the NAT device.  Example: network.static_nat.addr = 172.16.1.1  Note: It works only if the value of the parameter "network.static_nat.enable" is set to 1 (Enabled).	common. cfg
NAT&ICE		ice.enable =	0 or 1	0	Add	It enables or disables the ICE	common.

						(Interactive Connectivity Establishment) feature on the IP DECT phone. 0-Disabled 1-Enabled	cfg
NAT&ICE		sip.nat_turn.password =	String	Blank	Add	It configures the password to authenticate to the TURN (Traversal Using Relays around NAT) server. Example: sip.nat_turn.password = yealink1105 Note: It works only if the value of the parameter "sip.nat_turn.enable" is set to 1 (Enabled).	common.cfg
Register Basic	account.X.outbound_host =	account.X.outbound_proxy.Y.address =	IP address or domain name	Blank	Change	It configures the IP address or domain name of the outbound proxy server Y for account X. Example: account.1.outbound_proxy.1.address= 10.1.8.11 Note: It works only if the value of the parameter "account.X.outbound_proxy_enable" is set to 1 (Enabled).	MAC.cfg
Register Basic	account.X.outbound_port =	account.X.outbound_proxy.Y.port =	Integer from 0 to 65535	5060	Change	It configures the port of the outbound proxy server Y for account X. Example: account.1.outbound_proxy.1.port = 5060 Note: It works only if the value of the parameter "account.X.outbound_proxy_enable" is set to 1 (Enabled).	MAC.cfg
Register	account.X.	account.X.outbound_proxy.Y.address =	IP address or	Blank	Change	It configures the IP address	MAC.cfg

Basic	backup_outbound_host =	tbound_proxy.Y.address =	domain name			or domain name of the outbound proxy server Y for account X.  Example: account.1.outbound_proxy.1.address= 10.1.8.11  Note: It works only if the value of the parameter "account.X.outbound_proxy_enable" is set to 1 (Enabled).	
Register Basic	account.X.backup_outbound_port =	account.X.outbound_proxy.Y.port =	Integer from 0 to 65535	5060	Change	It configures the port of the outbound proxy server Y for account X.  Example: account.1.outbound_proxy.1.port = 5060  Note: It works only if the value of the parameter "account.X.outbound_proxy_enable" is set to 1 (Enabled).	MAC.cfg
Broadsoft Call Waiting		call_waiting.mode =	0 or 1	0	Add	It configures the call waiting mode.  0-Local 1-XSI  If it is set to 1 (XSI), the status of the call waiting feature between the IP DECT phone and the BroadWorks server is synchronous.  Note: If it is set to 1 (XSI), it works only if the value of the parameter "bw.xsi.enable" is set to 1 (Enabled).	common.cfg
Broadsoft XSI (X ranges from 1 to		bw.xsi.enable =	0 or 1	0	Add	It enables or disables the XSI authentication feature for the IP DECT phone.	MAC.cfg

5.)						<p>0-Disabled 1-Enabled</p> <p>If it is set to 0 (Disabled), the following features are unavailable on the phone:</p> <ul style="list-style-type: none"> <li>BroadWorks Anywhere</li> <li>Remote Office</li> <li>Line ID Blocking</li> <li>Anonymous Call Rejection</li> <li>Simultaneous Ring Personal</li> <li>BroadSoft Directory</li> <li>BroadSoft Call Log</li> <li>Call Park Feature via XSI Mode</li> </ul> <p>Note: It works only if the value of the parameter "bw.enable" is set to 1 (Enabled).</p>	
Broadsoft Call Log	bw_phonebook.call_log_enable =	bw.xsi.call_log.enable =	0 or 1	0	Change	<p>It enables or disables the network call log feature.</p> <p>0-Disabled 1-Enabled</p> <p>Note: It works only if XSI is configured for account 1 and the value of the parameter "bw.xsi.enable" is set to 1 (Enabled).</p>	MAC.cfg